

Avalon & Tahoe Mfg., Inc.	Work Instruction			
	INTEGRATED BIMINI TOP INSTALLATION			
	1.1	Page 1 of 5	Part #127127	Rev A

Prepared: Kara Passage	Approved:	Approval Date:
---------------------------	-----------	----------------

1.0 Purpose

- 1.1 The purpose of this document is to provide instructions to install and take off an integrated bimini top.

2.0 Responsibility

- 2.1 Line employees are responsible for ensuring that the activities associated with this work instruction are followed and maintained accurately.

3.0 Tools needed:


- 3.1 Knitting needle

4.0 Instructions to Take Off Integrated Bimini Top

- 4.1 Open Velcro flap at the rear of the bimini top



4.2 Loosen pulley that is located at the rear of the bimini top by releasing the latch.

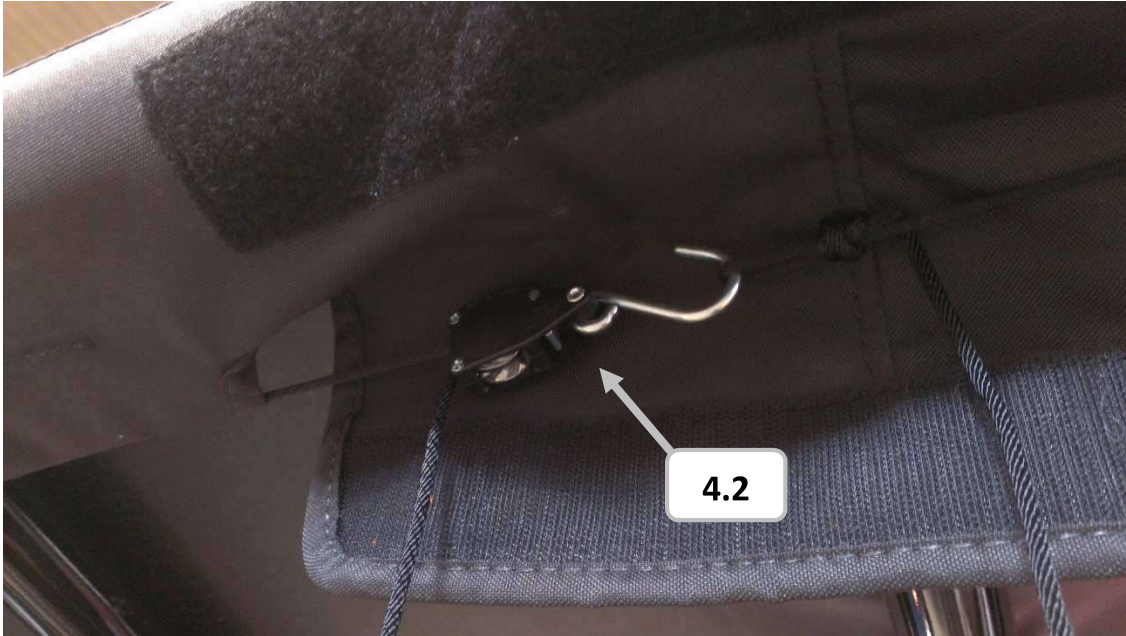

4.3 Starting at the starboard side, walk towards the front of the boat pulling the string completely out of the bimini top at each access hole.



4.4 Continue following the edge of the bimini top until the string is pulled completely out of the bimini top.

4.5 Remove bimini top from wake tower.

5.0 Install Integrated Bimini Top

- 5.1 Position bimini top on top of wake tower. The hole goes towards the rear to be used for the navigation light.



- 5.2 Using a knitting needle or similar object, pull the string through the bimini top starting at the port side of the rear access hole, guiding around each knob along the way.




- 5.3 Continue around wake tower until the remaining string is hanging loose out of the rear hole by the Velcro flap. **DO NOT CUT OFF EXCESS STRING!**

5.4 Note that string will wrap around the wake tower at the front wake tower frame member.



5.5 After string is completely installed into the bimini top, pull tight by hand and ensure that the string is wrapped around each knob (1 on each side, 2 located in the rear, and 3 located in the front).



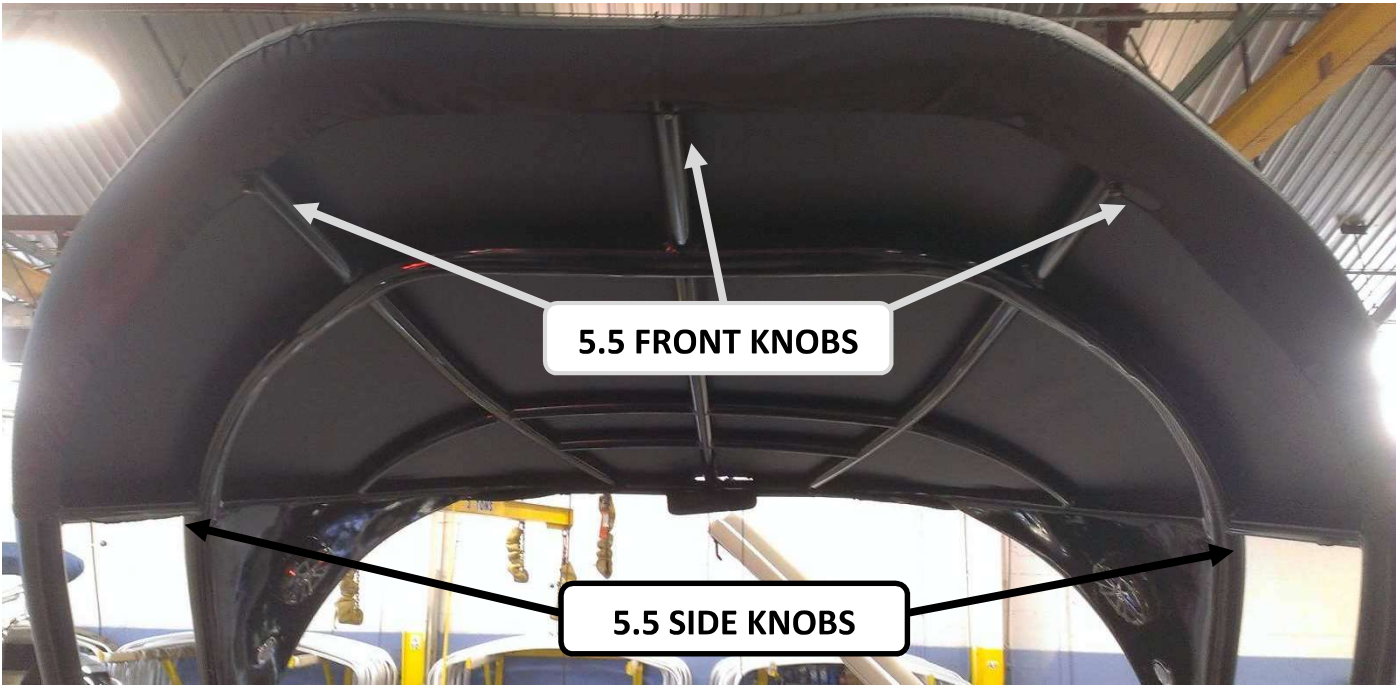

5.6 Hook string onto pulley and tighten (see photo from 4.2).

5.7 Gather excess string near pulley and close Velcro flap so that none of the excess string hangs out (see photo from 4.1).

6.0 Definitions: N/A

7.0 Document References: N/A

8.0 Records

8.1 Records will be maintained in accordance with System Operating Manual.

Revision Level	Effective Date	Description of Enhancements
A	9/25/2013	<ul style="list-style-type: none"> • Initial release
		<ul style="list-style-type: none"> •
		<ul style="list-style-type: none"> •